

1300 Degree Expansion Joint Composite Belt

Temperature Rating: 1300°F (704°C)

Composite Belt Material used for Expansion Joint Applications up to 1300°F

ChemShield™ 5407 Gas Barrier
100% Zero Porosity Belt.


Construction: PTFE Coated Fiberglass Cloth with 7 mil Teflon Film Laminated to the Flue Gas Side.
Temp Rating: 600°F (316°C) Continuous Service

(1) Layer 1/2" Thk. BGF Needled Fiberglass Blanket Insulation Rated for 1200°F (649°)
Excellent Strength for Vibration & Movements

(1) Layer 1" Thk. Ceramic Insulation 8# Density, Rated for 2300°F (1260°C)

Hot Stop Heavyweight Silica Cloth Rated for 2300°F (1260°C)
Abrasion Resistant Coating

1-11/16"
Uncompressed

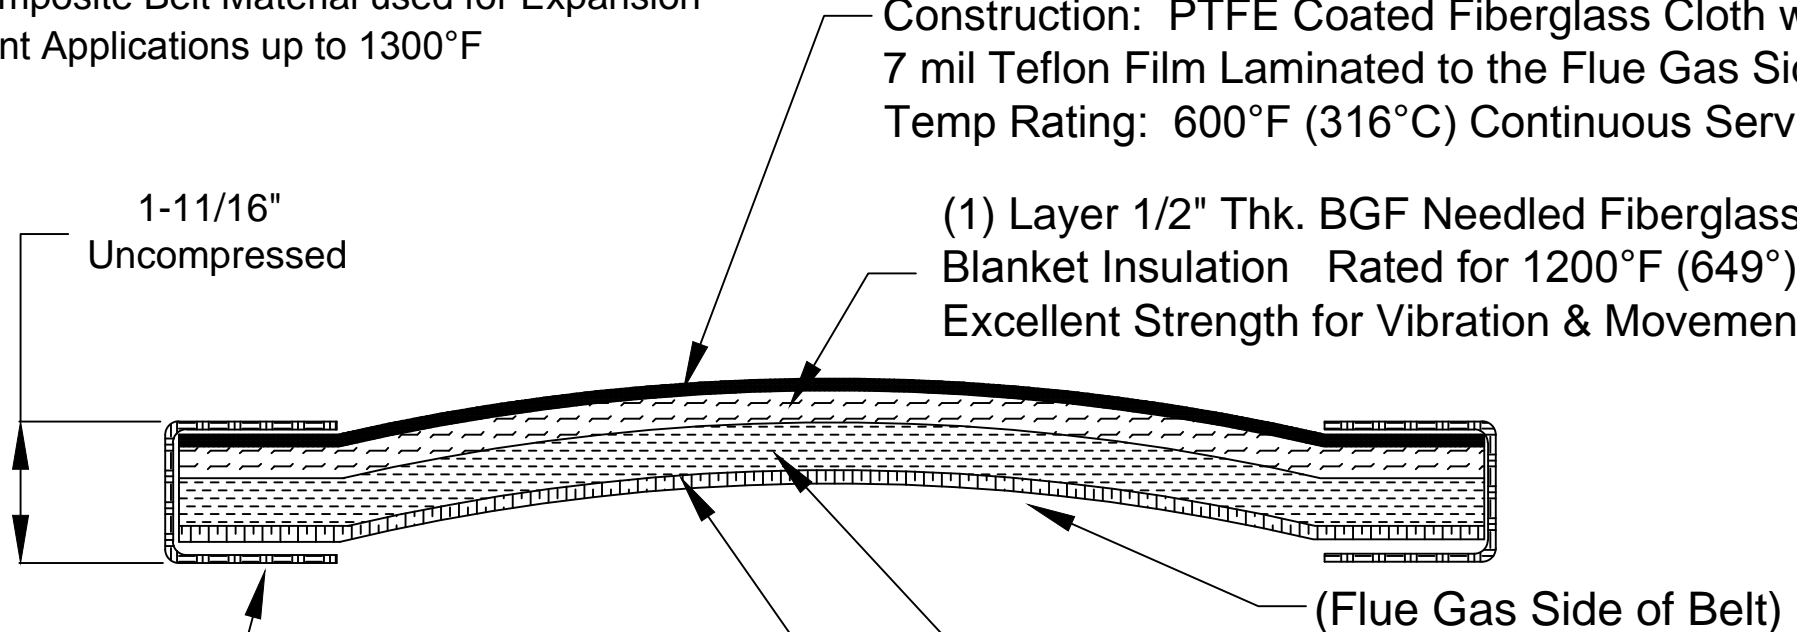

Vextra GLV 16 Tape 7-1/2" wide Vermiculite-Coated Fiberglass Cloth for Belt Edge Protection

FLEXCOM

6864 Chrisphalt Drive, Bath, PA 18014

(610) 837-3812

www.fcej.com

This drawing and its design are the property of Flexible Compensators, Inc. This drawing is loaned to you subject to the condition that it shall not be copied, lent, or otherwise disposed of, directly or indirectly. It shall not be used to furnish any information for the making of drawings, prints, or apparatus, or parts thereof, except where otherwise specifically provided for by contract agreement with Flexible Compensators, Inc.

UNITS:
INCHES

DATE:

DRAWING NUMBER:

REV