


## ChemShield® 8112 Material Specification

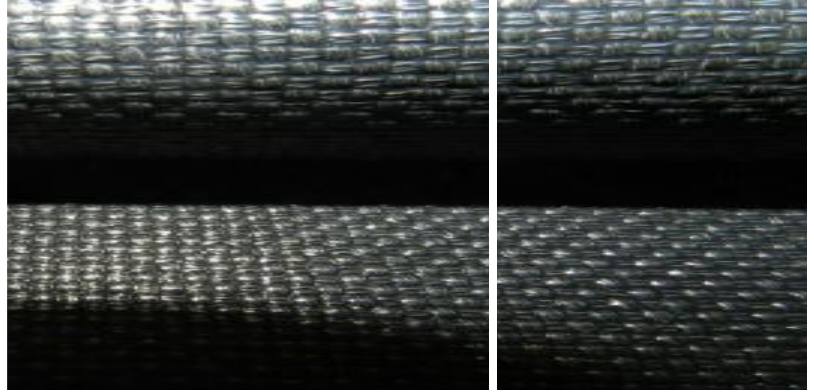

### Property Ratings

<b>Resistance to Vibrations</b>	<i>Very Good</i>
<b>Resistance to Movements</b>	<i>Very Good</i>
<b>Resistance to Abrasion</b>	<i>Very Good</i>
<b>Resistance to Solvents</b>	<i>Excellent</i>
<b>Resistance to Oils</b>	<i>Excellent</i>
<b>Resistance to Alkali</b>	<i>Excellent</i>
<b>Resistance to Dilute Acids</b>	<i>Excellent</i>
<b>Resistance to Concentrated Acids</b>	<i>Excellent</i>
<b>Resistance to Flames</b>	<i>Not Recommended</i>
<b>Resistance to Weather / UV</b>	<i>Excellent</i>


### Physical Properties

#### Materials of Construction

*Zero Porosity PTFE Film Laminated to a Flexible PTFE Coated Fiberglass Cloth*

<b>Max. Operating Temperature:</b>	<i>600°F (316°C)</i>
<b>Min. Operating Temperature:</b>	<i>-80°F (-62°C)</i>
<b>Weight:</b>	<i>66 oz/yd<sup>2</sup></i>
<b>Thickness:</b>	<i>0.052"</i>
<b>Tensile Strength (Warp):</b>	<i>1200 lbs/in (10724 N/50mm)</i>
<b>Tensile Strength (Fill):</b>	<i>1200 lbs/in (10724 N/50mm)</i>
<b>Maximum Pressure:</b>	<i>7 PSI</i>
<b>Minimum Pressure:</b>	<i>-3 PSI</i>

### ChemShield® 8112 Materials

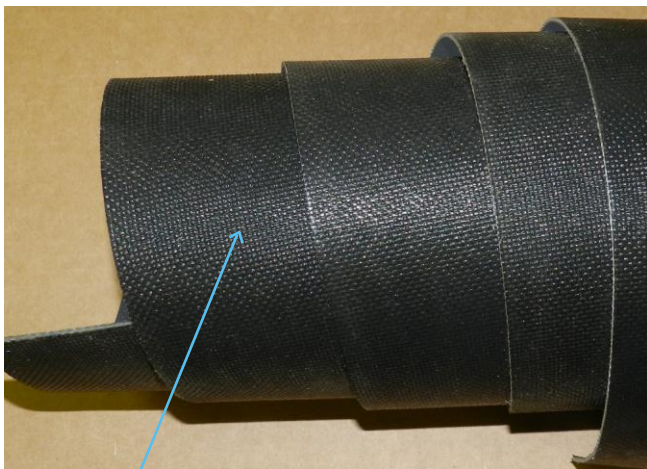

#### PTFE Corrosion / Gas Barrier

*Weight: 24 oz/yd<sup>2</sup> (814 g/m<sup>2</sup>)  
Thickness: 0.016" (0.40mm)  
Tensile Strength: 63 lb/in (563 N/50mm)  
Tear Strength: 22Lb (99.8 N)*

The picture at left shows the two components that make up the ChemShield® 8112 material. The outer PTFE coated fiberglass cloth provides the load bearing component, while the inner PTFE film provides the gas and corrosion barrier. The two layers are laminated together to form a single layer composite material capable of resisting stress cracking while providing flexibility and temperature resistance.

Our ChemShield® 8112 is one of our most durable materials combining flexibility and strength. This material has a 0.016" thick PTFE corrosion barrier for harsh conditions where chemical attack exists. Our ChemShield® II 8112 material is the best choice for heavy duty use with abrasion resistance requirements. This product is ideal for use in utility plants

*ChemShield® and FlexCom® are registered trademarks of Flexible Compensators, Inc. This information is supplied in good faith and is based on information currently available.*